


517 Lyons Ave. Irvington, NJ 07111 Phone: 973 371-1771 Fax: 973 371-4304 www.richards-mfg.com

## **Product Specifications**

## 15 kV 200A Loadbreak Bushing Insert



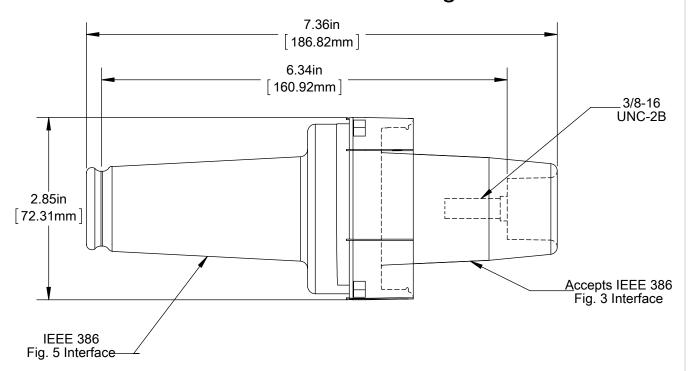

Richards 15 kV 200A Loadbreak Bushing Insert (21LBI) converts a 200A bushing well interface (IEEE 386, Fig. 3) to a 200A loadbreak interface (IEEE 386, Fig. 5) for use with a loadbreak elbow or cap.

The insert includes an internal 5/16" hex broach for assembly according to manufacturer's instructions.

Prod	luct	Rati	ngs

Operating Voltage	8.3 kV L-G 14.4 kV L-L	
Impulse Withstand	95 kV BIL	
AC Withstand	34 kV	
DC Withstand	53 kV	
Partial Discharge	11 kV CEV	
Momentary	10 kA, 10 cycles	
Continuous and Loadbreak Current	200 Amp	

Richards 15 kV 200A Loadbreak Bushing Insert (21LBI) was designed and validated against the following industry standards:

- ANSI/IEEE Std. 386: For Separable Insulated Connector Systems